

# Simple Control Indicator


## SI 410



### Feature


- Dual color display
- Weighing mode : Limit mode, Packer mode, Checker mode, Accumulating mode
- User custom setting : External input, Relay output
- Hold Function : Sample, Average, Peak
- SD memory(Optional card)
- MODBUS(RTU) protocol(Optional card)

### Physical Dimension [Unit:mm]

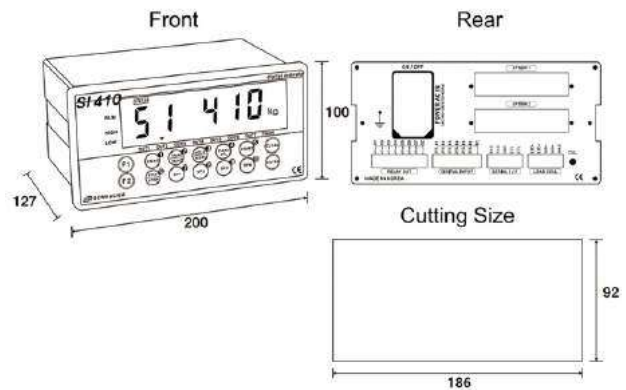

INDICATOR


		SI 410
ANALOG PART	Input Sensitivity	Min. 0.1 $\mu$ V / Digit
	Load Cell Excitation	DC 5V
	Non-Linearity	0.001% of Full Scale
	Input Signal	Max 3.0 mV/V
	A/D Sampling	Max 120 time/sec, Sigma-Delta
	Resolution	Internal: 1/2,000,000 Display: 1/20,000
DISPLAY PART	Main Display	7 Segment, 6 Digit Red FND, Letter size: 25,4mm
	State Alarm	Green LED, 8EA
	Under Zero	Minus(-) Display
GENERAL PART	Power Supply	Free Voltage(AC 100V~240V, 50/60Hz)
	Operating Condition	Temperature: -10 $^{\circ}$ C~+40 $^{\circ}$ C, Humidity: Under 85% RH
	Size/Weight	200(W)x100(H)x126.5(D) / 1,25kg
	Interface	RS232C, Current loop, Modbus (Option)
	External Input	6EA
	Relay Output	7EA (User Selectable)
	Option	Analog Output 0~10V, 4~20mA / Serial Interface RS232C, RS422, RS485 BCD Input / BCD Output / Ethernet / SD memory card




Crane Scale



Tester



Tank Scale



Truck Scale